


PRE-CAST CONCRETE COVER SLAB WITH TYPE 'M' BOLT DOWN LID. REFER GCCC STD DWG 08-07-121. BOLT DOWN WITH 4/316 S/S BOLTS. UNDERSIDE OF COVER TO BE LINED WITH CORROSION RESISTANT MATERIAL

SHAFT SECTIONS TO SUIT MANUFACTURER'S SPECIFICATIONS. MANUFACTURER TO SUBMIT WORKSHOP DRAWINGS FOR APPROVAL PRIOR TO MANUFACTURE.

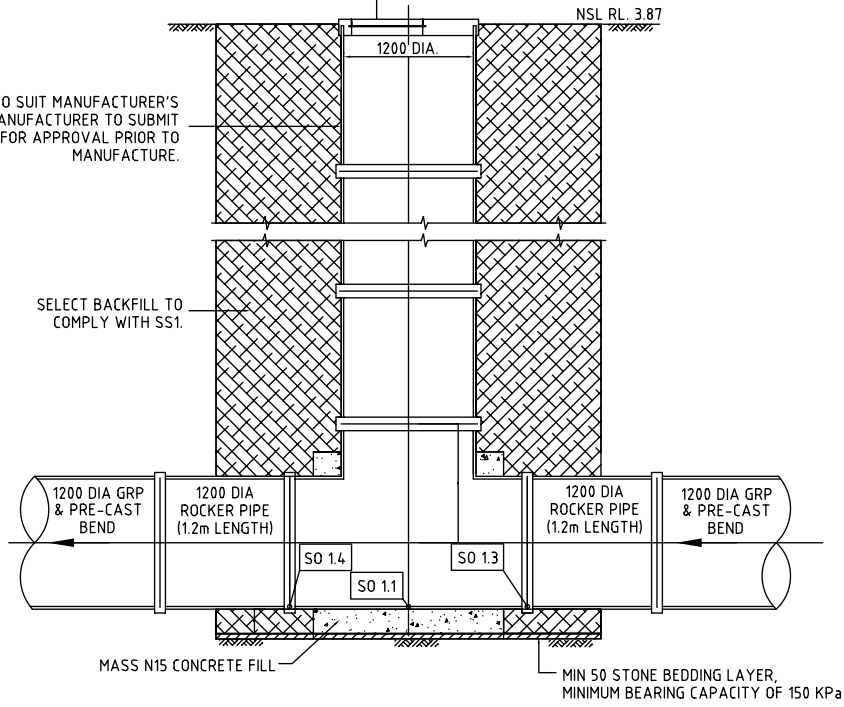

SECTION TYPICAL THROUGH SECTION

NOTES

1. MANHOLE SHAFT TO BE SUITABLE TO SUPPORT DESIGN TRAFFIC LOAD.
2. COVER SLAB TO BE DESIGNED AND SUPPLIED BY MANHOLE MANUFACTURER.
3. ALL MATERIALS REQUIRED FOR MANHOLE INSTALLATION TO BE SUPPLIED BY MANHOLE SUPPLIER WITH EXCEPTION OF BACKFILL MATERIALS AND IN-SITU CONCRETE.
4. VARIATIONS TO DESIGN SUBJECT TO APPROVAL.
5. SUPPLIER TO SPECIFY EXTENTS, LOCATION AND VOLUME OF CONCRETE REQUIRED FOR PREVENTING FLOTATION. NO CONCRETE ALLOWED OVER FLEXIBLE JOINTS.
6. NO LADDER IS TO BE PROVIDED.
7. ALL INTERNAL EXPOSED SURFACES TO BE CORROSION RESISTANT.
8. MANUFACTURER TO PROVIDE DETAIL DRAWINGS FOR APPROVAL PRIOR TO MANUFACTURE.
9. ALL GRP TEES, BENDS AND RISER COMPONENTS SHALL BE MINIMUM STIFFNESS OF SN10,000.



GOLD COAST CITY COUNCIL
PO BOX 5042
GOLD COAST MC 9729

THIS DRAWING IS NOT TO BE AMENDED WITHOUT REFERENCE TO STANDARDS COMMITTEE					CONTROLLED DOCUMENT
No.	AMENDMENT	APPROVED	DATE	ISSUED	

DO NOT SCALE TAKE FIGURED DIMENSIONS ONLY	
DRAWN BY	C.G.W 08/07/08
PASSED	R. WENT 08/07/08
APPROVED	R. WENT 08/07/08

STANDARD DRAWING

TRUNK MH OPTION DN1200 AND LARGER SEWERS

MICROFILMED
STANDARD DRAWING No. 08-07-140
ISSUE 2008 EDITION