

**FOOTING IN TURF / GARDEN BED - SECTION**

**CONCRETE NOTES**

AT A MINIMUM ALL CONCRETE TO BE GRADE N20 BROOM FINISHED 100mm MIN THICKNESS. ALL CONCRETE WORKS TO BE REINFORCED MIN SL72. ENSURE MIN TOP COVER OF 50mm.

FOR SLIP RESISTANCE REQUIREMENTS REFER SPECIFICATION S150 ROADWORKS.

ALL PATHWAY/PAVEMENT AREAS TO HAVE 1:50 MINIMUM CROSS-FALL.

CONTRACTION JOINTS (WHERE REQUIRED) AS A GUIDE LOCATED @ 1.5m c/c. JOINT TO BE SAW CUT 6mm WIDE x 40mm DEEP WITHIN 4-6 HRS OF PLACEMENT. PLACE MESH CENTRALLY OVER JOINT AND CUT EVERY SECOND BAR OVER JOINT.

EXPANSION JOINTS (WHERE REQUIRED) AS A GUIDE LOCATE @ 6m c/c. JOINT TO BE FULL DEPTH 10mm THICK CLOSED CELL CROSS-LINKED POLYETHYLENE FOAM (85-150kg/m<sup>3</sup>). SEAL SURFACE OF JOINT WITH 10mm DEEP POLYETHYLENE SEALANT ('SIKAFLEX 1A SILICON' OR EQUIVALENT). PAVEMENT AREAS BEYOND THIS DETAIL TO BE REVIEWED BY ENGINEER.

PATHWAYS & PAVEMENTS TO COMPLY WITH AUSTRALIAN STANDARDS AND COUNCIL REQUIREMENTS FOR ACCESS & MOBILITY (AS 1428).

**FIXTURES / FITTINGS / METAL WORK NOTES**

ALL FIXTURES/FITTINGS UNLESS SPECIFIED ARE TO BE HOT DIPPED GALVANISED. SPECIFY STAINLESS STEEL FIXINGS IN VICINITY OF SALTWATER/SPRAY - ENSURE SEPARATION BETWEEN VARIOUS METALS TO PREVENT METAL CORROSION.

GRIND SMOOTH EDGES & WELDS PRIOR TO H.D.G. OR APPLIED FINISHES.

ALL WELDS TO BE CONTINUOUS, GROUND OFF SMOOTH & FLUSH.

WHERE POSSIBLE ALL FIXINGS TO BE TAMPER/VANDAL PROOF TO MINIMISE DAMAGE OR THEFT.



**DOG REFUSE BIN**

**GENERAL NOTES**

ENSURE RUBBISH BINS ARE LOCATED AND LANDSCAPED IN ACCORDANCE WITH THE APPROVED DETAILED PROJECT DRAWINGS, SUBDIVISION AND DEVELOPMENT GUIDELINES.

ENSURE RUBBISH BINS MUST BE CLEANED OF CONCRETE SLURRY OR SPRAY WHEN INSTALLED TO PREVENT STAINING OR DAMAGE TO APPLIED FINISHES.

COLOUR SELECTION FOR COATINGS IN ACCORDANCE WITH STANDARD GCCC CORPORATE COLOUR PALETTE (2 PACK EPOXY).

BIN MAKE, MODEL AND FINISH AS SPECIFIED IN APPROVED LANDSCAPE DETAILED PLANS.


ALL DIMENSIONS IN MILLIMETRES (U.N.O.).

**DOG REFUSE BIN SPECIFICATION**

FRONT OR REAR MOUNTED BAG DISPENSER, FLY AND WEATHER PROOF FLAP.

SEPARATE VERMIN PROOF STEEL LINER.

INSTALL DOG REFUSE BIN IN APPROVED LOCATION - REFER TO GCCC STD DWG No 05-005 OR APPROVED DETAILED LANDSCAPE PLANS FOR LOCATION OF BIN IN RELATION TO DOG OFF LEASH AREAS.

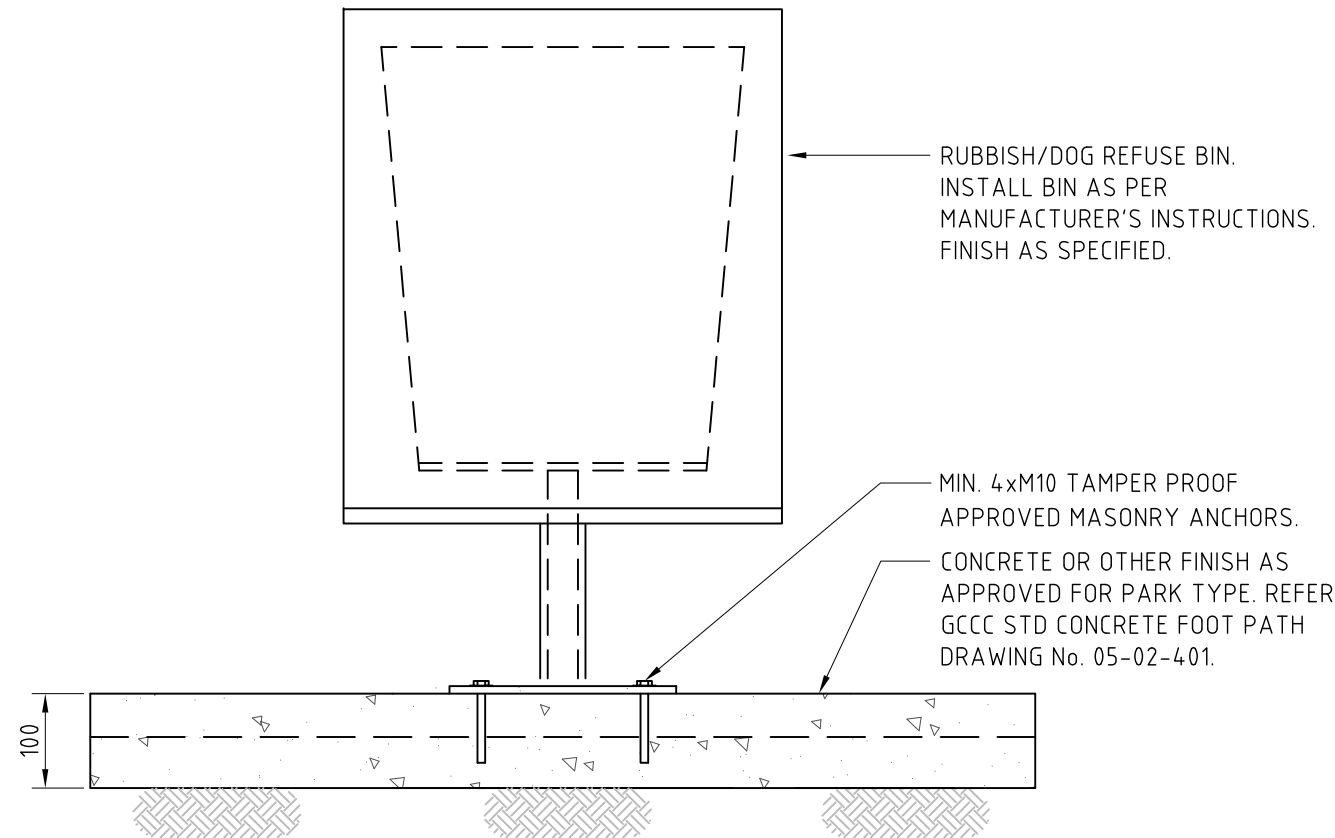

**RUBBISH BIN IN CONCRETE PAVEMENT - SECTION**



**Gold Coast City Council**

GOLD COAST CITY COUNCIL  
PO BOX 5042  
GOLD COAST MC 9729

THIS DRAWING IS NOT TO BE AMENDED WITHOUT REFERENCE TO STANDARDS COMMITTEE		CONTROLLED DOCUMENT	DO NOT SCALE TAKE FIGURED DIMENSIONS ONLY		<b>STANDARD DRAWING</b>	MICROFILMED
No.	AMENDMENT	APPROVED	DATE	ISSUED		STANDARD DRAWING No. <b>13-05-001</b>
					<b>DOG OFF LEASH AREAS RUBBISH/DOG REFUSE BIN</b>	ISSUE <b>2013 EDITION</b>
						THIS DRAWING HAS BEEN SOURCED FROM BRISBANE CITY COUNCIL STANDARD DRAWINGS 2001 - SERIES 700 : PARKS

DRAFTING BY  
TECHNICAL SERVICES BRANCH  
PASSED - COORDINATOR OPEN SPACE ASSETS  
SIGNED:  
NAME: CAMERON TAYLOR DATE: 6/12/12  
APPROVED - MANAGER PARKS & RECREATIONAL SERVICES  
SIGNED:  
NAME: RON JACOBS DATE: 6/12/12