



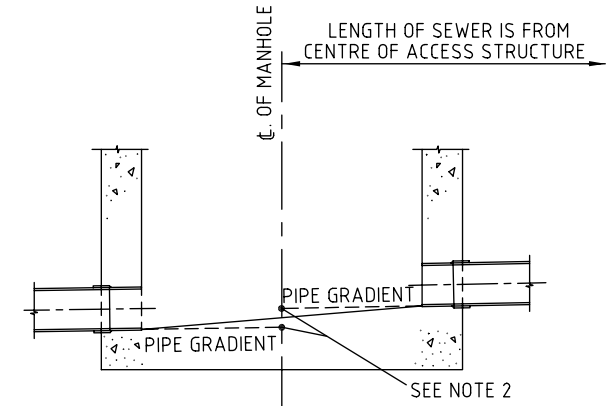
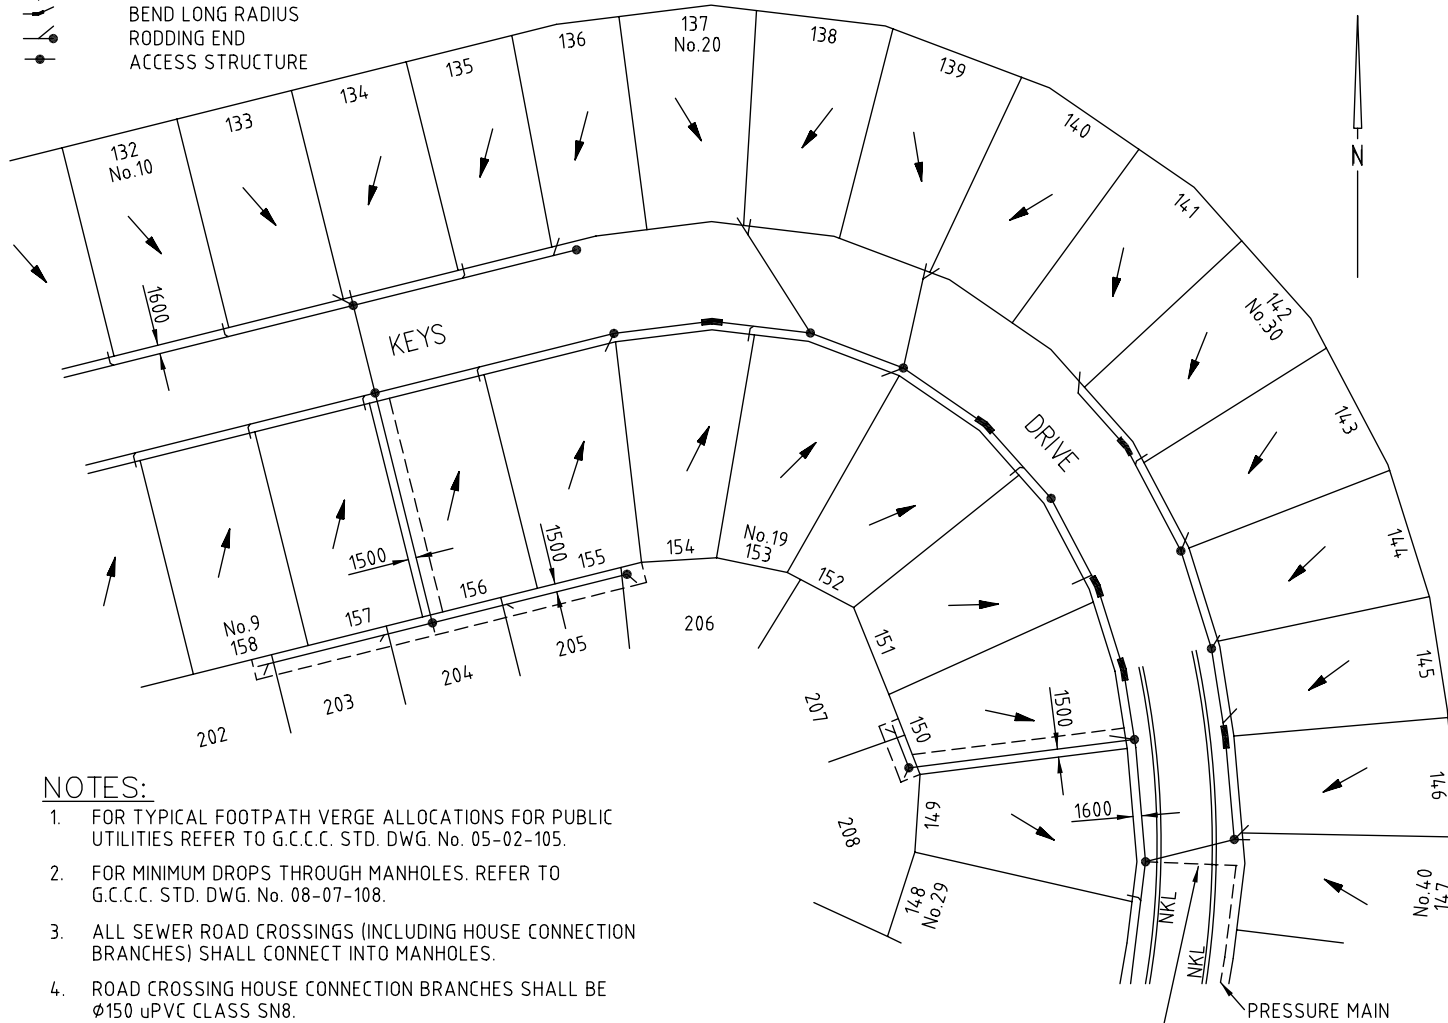


LEGEND

-  HOUSE CONNECTION BRANCH
-  BEND LONG RADIUS
-  RODDING END
-  ACCESS STRUCTURE

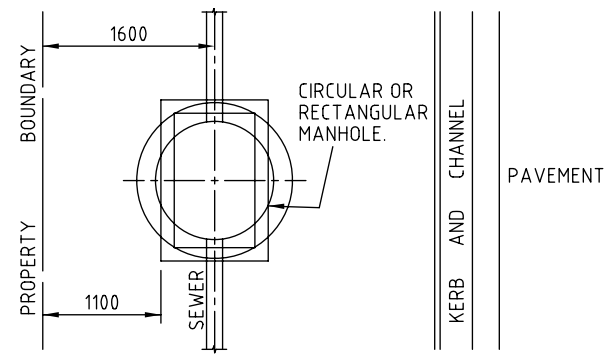


SETTING OUT DETAILS
CONSTRUCTION & AS-CONSTRUCTED

NOTES:


1. FOR TYPICAL FOOTPATH VERGE ALLOCATIONS FOR PUBLIC UTILITIES REFER TO G.C.C.C. STD. DWG. No. 05-02-105.
2. FOR MINIMUM DROPS THROUGH MANHOLES. REFER TO G.C.C.C. STD. DWG. No. 08-07-108.
3. ALL SEWER ROAD CROSSINGS (INCLUDING HOUSE CONNECTION BRANCHES) SHALL CONNECT INTO MANHOLES.
4. ROAD CROSSING HOUSE CONNECTION BRANCHES SHALL BE $\phi 150$ uPVC CLASS SN8.
5. PRIOR TO COMMENCING WORK ON SITE THE CONTRACTOR SHALL DETERMINE THE LOCATION OF ALL EXISTING PUBLIC UTILITIES.
6. THE CONTRACTOR SHALL ENSURE THAT THE WORKS ARE CARRIED OUT IN ACCORDANCE WITH THE REQUIREMENTS OF ALL CURRENT ACTS, REGULATIONS AND LOCAL LAWS.
7. FOR CONSTRUCTION TOLERANCES REFER COUNCIL'S STANDARD SPECIFICATION SS1.
8. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS SHOWN OTHERWISE.

ROAD CROSSING OF PRESSURE MAINS SHALL BE DUCTILE IRON FROM BACK OF KERB TO BACK OF KERB WITH MINIMUM COVER OF 600. MARKING SHALL BE CONDUIT MARKERS PLACED ON EACH KERB STATING "S" FOR SEWERAGE.



SEWER LOCATION IN FOOTPATH

TYPICAL LAYOUT PLAN

 Gold Coast City Council <small>GOLD COAST CITY COUNCIL PO BOX 5042 GOLD COAST MC 9729</small>	THIS DRAWING IS NOT TO BE AMENDED WITHOUT REFERENCE TO STANDARDS COMMITTEE				CONTROLLED DOCUMENT	DO NOT SCALE TAKE FIGURED DIMENSIONS ONLY	STANDARD DRAWING SEWERAGE RETICULATION TYPICAL ARRANGEMENT DETAILS	MICROFILMED
						DRAWN BY G.C.W		STANDARD DRAWING No. 08-07-001
						PASSED D. HAYMAN 08/07/08		ISSUE 2008 EDITION
	No.	AMENDMENT	APPROVED	DATE	ISSUED	APPROVED R. WENT 08/07/08		