



PLAN  
DIVERSION DRAIN TO  
STORMWATER OUTLET

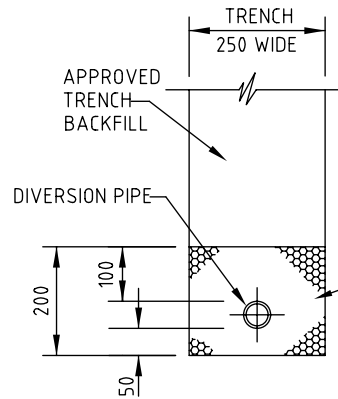

SECTION A-A  
DIVERSION DRAIN  
TRENCH

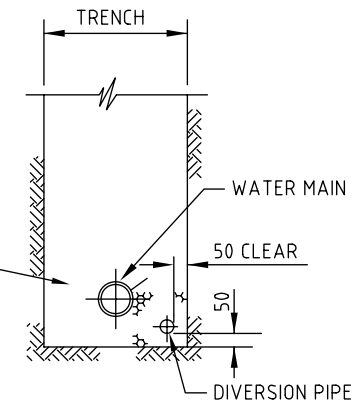

SECTION B-B

NOTES

1. DIVERSION PIPES AND FITTINGS TO BE  $\phi 50$  SLOTTED POLYTHYLENE CLASS 400 TO A.S.2439.
2. FOR BEDDING MATERIAL REQUIREMENTS (GRADE 5/7) REFER COUNCIL'S STANDARD SPECIFICATION SS2.
3. DIVERSION DRAINS ARE TO BE FITTED WITH A FILTER SLEEVE/SOCK AS DIRECTED BY THE SUPERINTENDENT.
4. LOCATE THE DIVERSION PIPE CENTRALLY IN TRENCH 50 ABOVE TRENCH FLOOR. PROVIDE END CAPS AT ALL PIPE ENDS.
5. DIMENSIONS ARE IN MILLIMETRES UNLESS SHOWN OTHERWISE.



**Gold Coast City Council**  
GOLD COAST CITY COUNCIL  
PO BOX 5042  
GOLD COAST MC 9729

THIS DRAWING IS NOT TO BE AMENDED WITHOUT  
REFERENCE TO STANDARDS COMMITTEE

CONTROLLED  
DOCUMENT

DO NOT SCALE  
TAKE FIGURED DIMENSIONS ONLY

**STANDARD DRAWING**

MICROFILMED

DRAWN BY

G.C.W

PASSED

D. HAYMAN

08/07/08

APPROVED

R. WENT

08/07/08

**DRAINAGE OF  
WATER MAIN TRENCHES AND  
DIVERSION DRAINS**

STANDARD  
DRAWING No.

08-06-104

ISSUE

2008 EDITION

No.	AMENDMENT	APPROVED	DATE	ISSUED