


\* DIMENSION TO BE CONFIRMED BY SUPERINTENDENT PRIOR TO PAINT APPLICATION

PAVEMENT MARKING AS DETAILED BELOW

**KERBED STREETS/ROADS**

**TYPICAL PAVEMENT MARKING PLAN FOR VALVES**

REFER NOTES

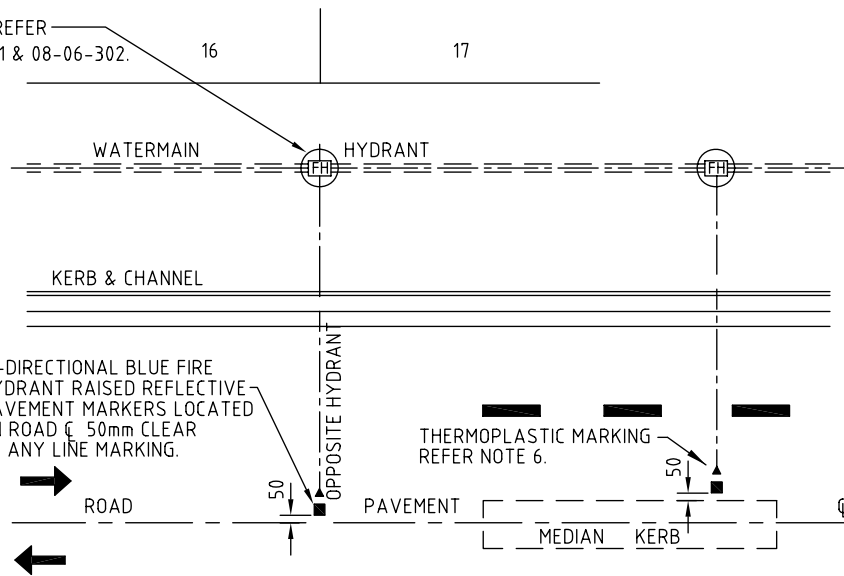


BI-DIRECTIONAL BLUE FIRE HYDRANT RAISED REFLECTIVE PAVEMENT MARKERS LOCATED ON ROAD  $\phi$  50mm CLEAR OF ANY LINE MARKING.

THERMOPLASTIC MARKING REFER NOTE 6.

**KERBED STREETS/ROADS**

**TYPICAL PAVEMENT MARKING PLAN FOR HYDRANTS**

REFER NOTES

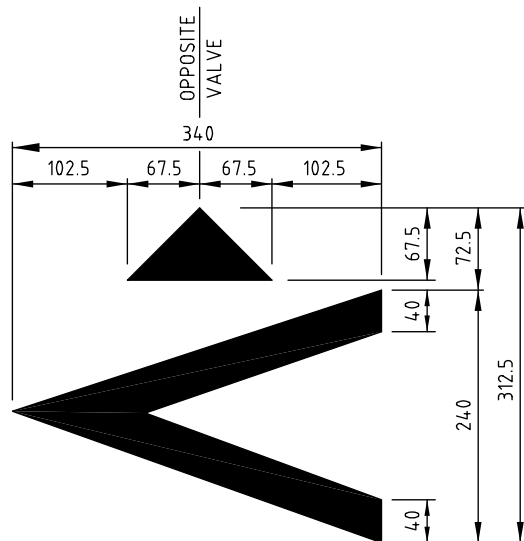

**PAVEMENT MARKING FOR VALVES**

REFER NOTE 5

**NOTES:**

1. PAVEMENT MARKING FOR VALVES SHALL BE OF AN APPROVED REFLECTIVE PAINT, INCORPORATING APPLIED GLASS BEADS, MANUFACTURED TO THE REQUIREMENTS OF MAIN ROADS. THE PAINT COLOUR SHALL BE AS DETAILED IN G.C.C.C. STD. DWG. No. 08-06-126.
2. PAVEMENT MARKING FOR VALVES SHALL BE LOCATED CLEAR OF THE PARKING LANE SO THAT TYRE WEAR IS MINIMISED. THE EXACT LOCATION SHALL BE DETERMINED BY THE SUPERINTENDENT FOLLOWING SITE INSPECTIONS.
3. FOR COUNCIL CONTROLLED ROADS, RAISED BLUE FIRE HYDRANT MARKERS SHALL BE IN ACCORDANCE WITH AS1906.3. THE BLUE REFLECTOR SHALL FACE THE DIRECTION OF APPROACHING TRAFFIC & THE YELLOW THERMOPLASTIC MARKER POINTING TO THE HYDRANT.
4. FOR STATE CONTROLLED ROADS, RAISED BLUE FIRE HYDRANT MARKERS SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES.
5. THIS DWG SHOULD BE READ IN CONJUNCTION WITH THE PAVEMENT AND KERB MARKING DETAILS SHOWN ON G.C.C.C. STD. DWG. No 08-06-126.
6. DIMENSIONS ARE IN MILLIMETRES UNLESS SHOWN OTHERWISE.



THIS DRAWING IS NOT TO BE AMENDED WITHOUT REFERENCE TO STANDARDS COMMITTEE				CONTROLLED DOCUMENT	DO NOT SCALE TAKE FIGURED DIMENSIONS ONLY	STANDARD DRAWING	MICROFILMED	
No.	AMENDMENT	APPROVED	DATE	ISSUED	DRAWN BY G.C.W		PAVEMENT MARKING FOR LOCATING HYDRANTS AND SLUICE VALVES	STANDARD DRAWING No. 08-06-127
					PASSED D. HAYMAN 08/07/08			ISSUE
					APPROVED R. WENT 08/07/08			2008 EDITION

THIS DRAWING IS NOT TO BE AMENDED WITHOUT REFERENCE TO STANDARDS COMMITTEE				CONTROLLED DOCUMENT	DO NOT SCALE TAKE FIGURED DIMENSIONS ONLY	STANDARD DRAWING	MICROFILMED	
No.	AMENDMENT	APPROVED	DATE	ISSUED	DRAWN BY G.C.W		PAVEMENT MARKING FOR LOCATING HYDRANTS AND SLUICE VALVES	STANDARD DRAWING No. 08-06-127
					PASSED D. HAYMAN 08/07/08			ISSUE
					APPROVED R. WENT 08/07/08			2008 EDITION

THIS DRAWING IS NOT TO BE AMENDED WITHOUT REFERENCE TO STANDARDS COMMITTEE				CONTROLLED DOCUMENT	DO NOT SCALE TAKE FIGURED DIMENSIONS ONLY	STANDARD DRAWING	MICROFILMED	
No.	AMENDMENT	APPROVED	DATE	ISSUED	DRAWN BY G.C.W		PAVEMENT MARKING FOR LOCATING HYDRANTS AND SLUICE VALVES	STANDARD DRAWING No. 08-06-127
					PASSED D. HAYMAN 08/07/08			ISSUE
					APPROVED R. WENT 08/07/08			2008 EDITION

THIS DRAWING IS NOT TO BE AMENDED WITHOUT REFERENCE TO STANDARDS COMMITTEE				CONTROLLED DOCUMENT	DO NOT SCALE TAKE FIGURED DIMENSIONS ONLY	STANDARD DRAWING	MICROFILMED	
No.	AMENDMENT	APPROVED	DATE	ISSUED	DRAWN BY G.C.W		PAVEMENT MARKING FOR LOCATING HYDRANTS AND SLUICE VALVES	STANDARD DRAWING No. 08-06-127
					PASSED D. HAYMAN 08/07/08			ISSUE
					APPROVED R. WENT 08/07/08			2008 EDITION